

INSTALLATION INSTRUCTIONS FOR SCANNER INTERFACE 2.5.1.10, SERVICE PACK 07 AND DRIVER

NOTE:

- When installing the Scanner Interface 2.5.1.10 SP07 software make sure that the machine is not connected to the computer
- You must install the driver after installing the Service Pack

Installing Interface 2.5.1.10

1. Insert the CD marked *Scanner-Interface Ver. 10, SP7*
2. If installation does not automatically start, using the Explorer, open the CD and click **setup.exe**
3. The Welcome screen appears (Figure 1)

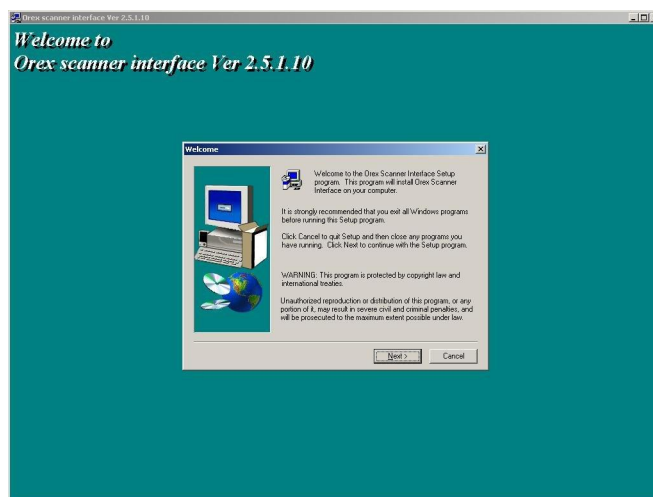


Figure 1: Scanner Interface Welcome Screen

4. Click **Next**. The software installs.

Catalog# AT095704-02

5. The Setup Complete screen opens (Figure 2). You do not have to restart the computer to continue the installation.

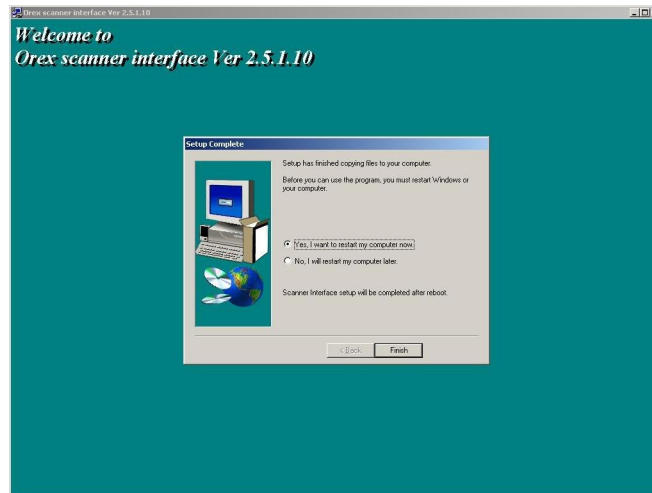


Figure 2: Installation Complete Screen

Installing the Service Pack

1. Make sure Scanner-Interface Version 2.5.1.10 is installed. It doesn't matter which previous Service Pack is installed. To check the version number, open the Scanner Interface, enter **Setup** in **User** mode, and click on the **About** Tab. The Scanner Interface version should read 2.5.1.10 (Figure 3).

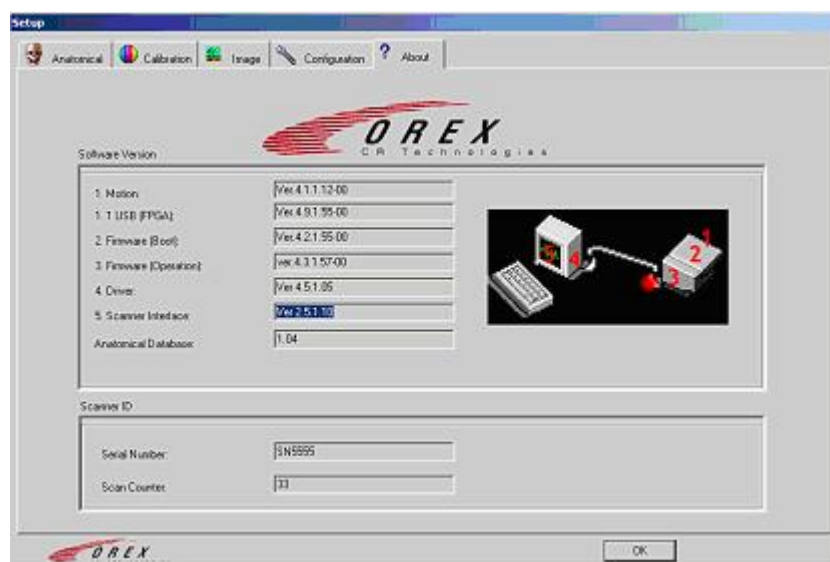


Figure 3: Checking Interface Version

Catalog# AT095704-02

2. Close the interface
3. Insert the CD marked *Scanner-Interface Ver. 10, SP7*
4. If installation does not automatically start, using the Explorer, open the CD and click **setup.exe**
5. The **Welcome** screen appears (Figure 4):

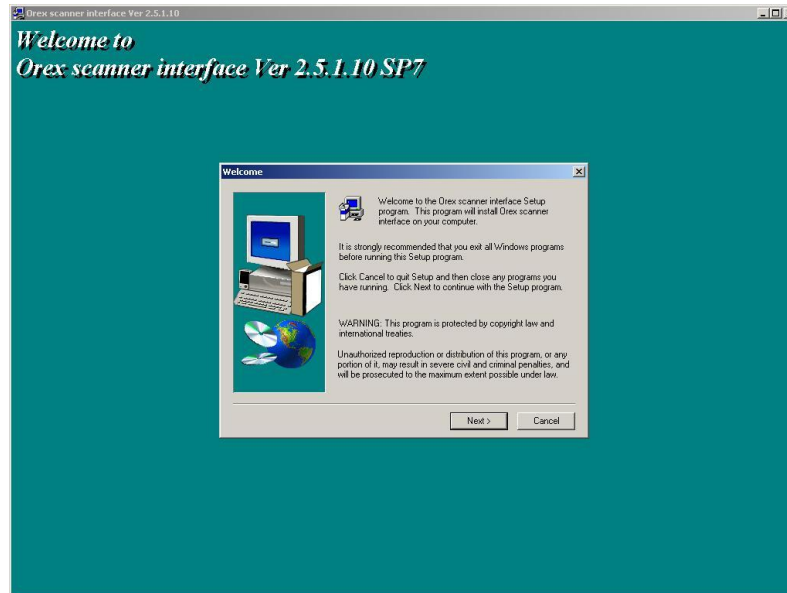


Figure 4: Welcome Screen

6. Click **Next**. The **Options** screen appears (Figure 5). Choose the appropriate option for your installation, and click **Next**.

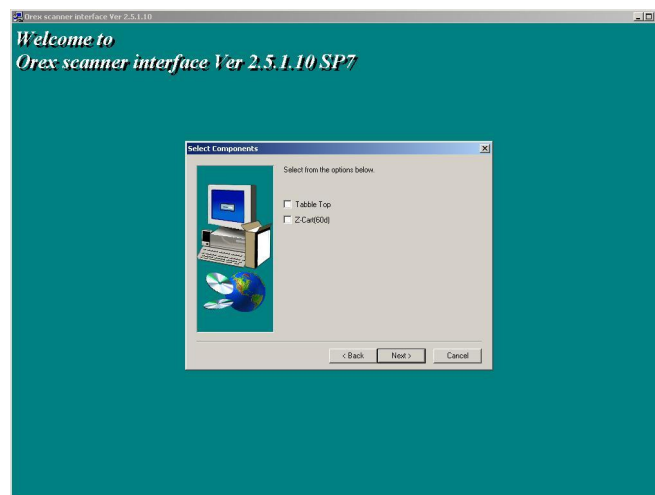


Figure 5: Options Screen

Catalog# AT095704-02

7. The **Setup Complete** screen opens (Figure 6). You do not have to restart the computer to continue the installation.

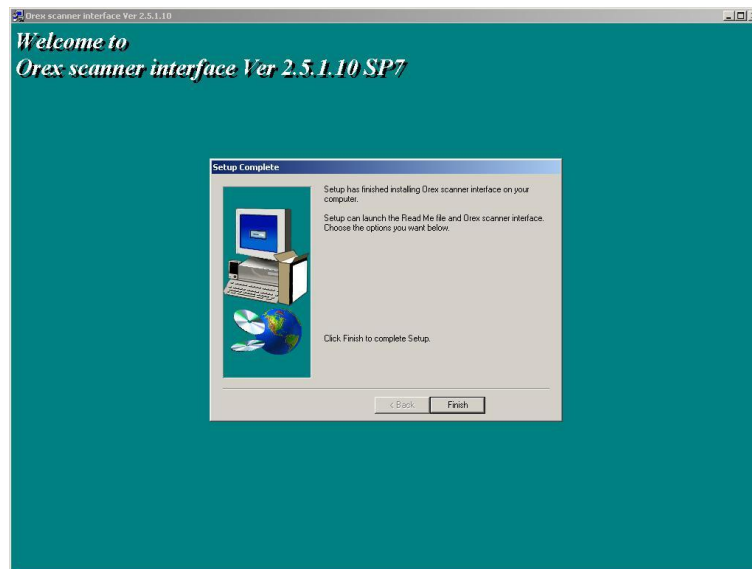


Figure 6: The Setup Complete Screen

8. Click **Finish**.
9. Turn the scanner on. Let the scanner finish the reset process properly.
Make sure that the flat cable connected to the USB is disconnected
10. Reopen the Scanner Interface program
11. In **Setup** choose **Orex technician mode** (code is 1331).
12. In the Operation tab (Figure 7), choose the type of scanner (ACL4/ACL2I) and click **Software update**

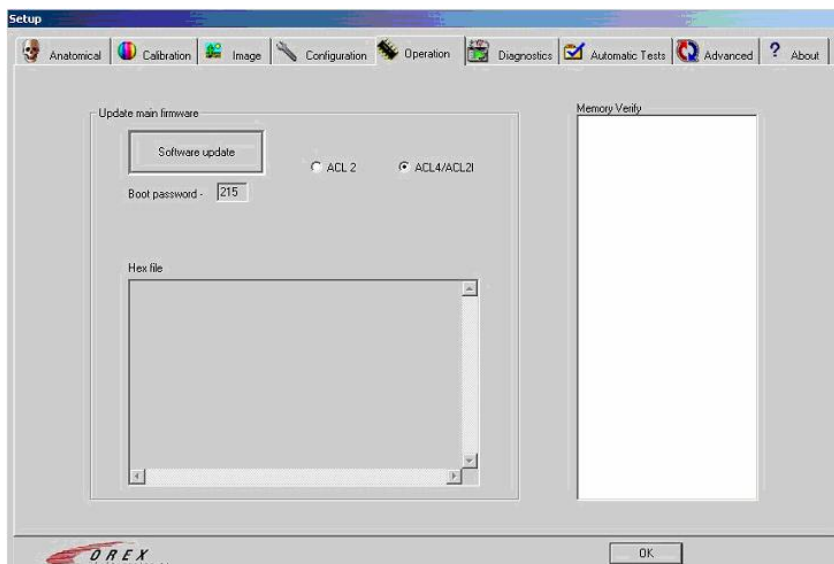


Figure 7: The Operation Tab

Catalog# AT095704-02

13. After the update process ends, click **OK** to return to main screen of the Scanner-Interface.
14. Exit the Scanner-Interface. Plug the flat cable back.

Updating the Driver

Before installing the driver the machine must be connected to the computer and turned on.

The old driver version is 4.1.04. The new driver version: 4.5.1.05

1. Turn the machine on.
2. Click **My Computer** on desktop and with right mouse button chose **Properties**

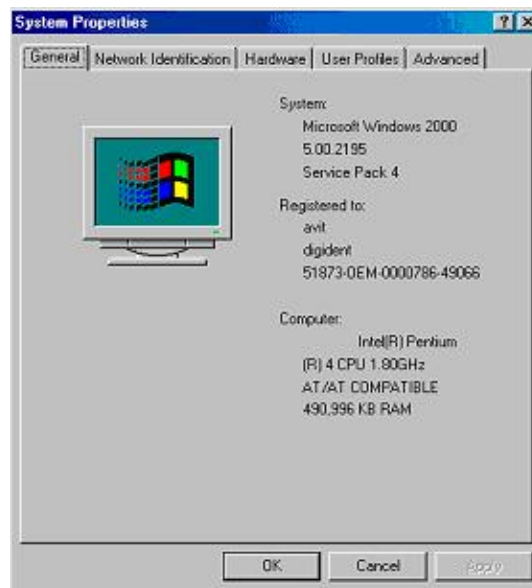


Figure 8: The System Properties Screen

3. Choose the **Hardware** tab (Figure 9)



Figure 9: The Hardware Tab

Catalog# AT095704-02

4. Select **Device Manager**, and choose **Imaging Devices**.
5. Double click **Orex Ver(2000)(M) 4.1.04** (Figure 10)

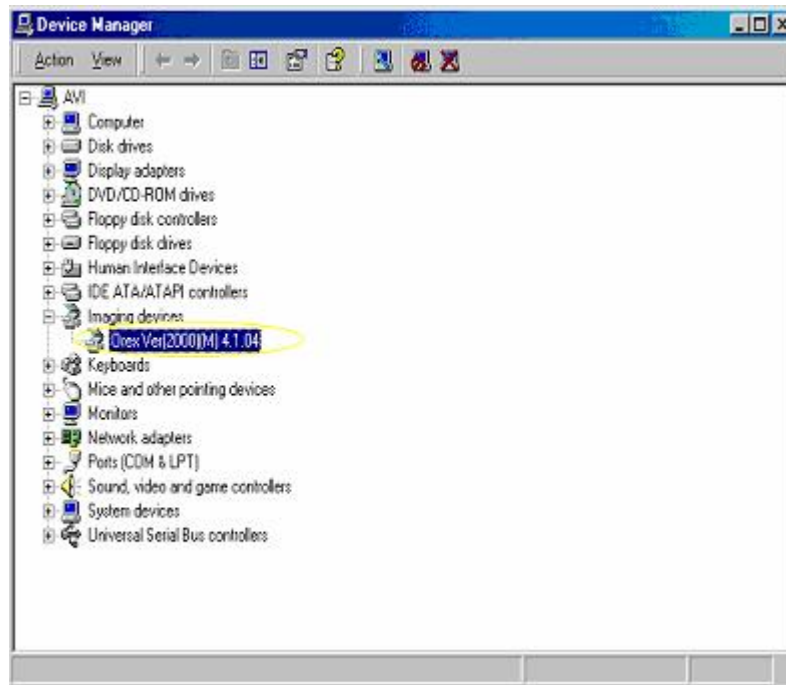


Figure 10: The Device Manager Screen

6. Select the **Driver** tab (Figure 11), and click **Update Driver**.

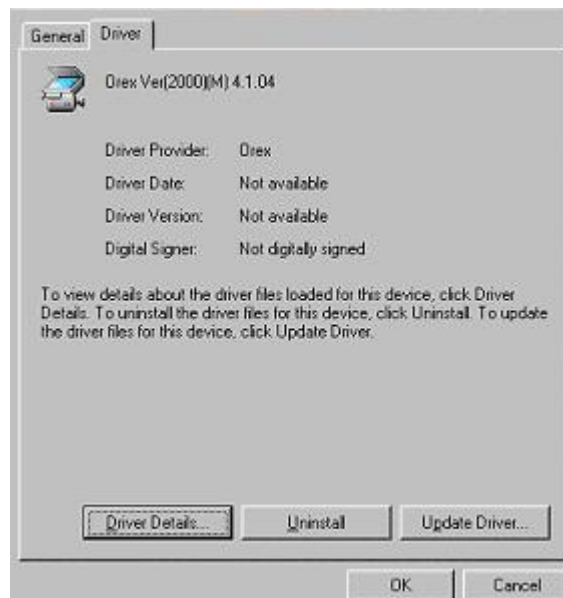


Figure 11: The Driver Tab

Catalog# AT095704-02

7. A message will appear indicating that Windows has found a new device, followed by the New Hardware Device Wizard (Figure 12).



Figure 12: Found New Hardware Wizard

8. Choose Next. The Search Option screen opens (Figure 13):

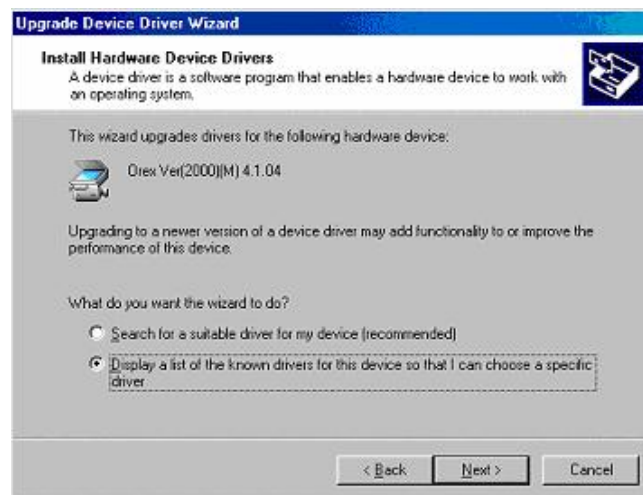


Figure 13: The Search Option Screen

9. Choose “Display a list of the known drivers for the device so that I can choose a specific driver”. Click **Next**. The **Select Device Driver** screen opens (Figure 14). Choose **Have Disk**:

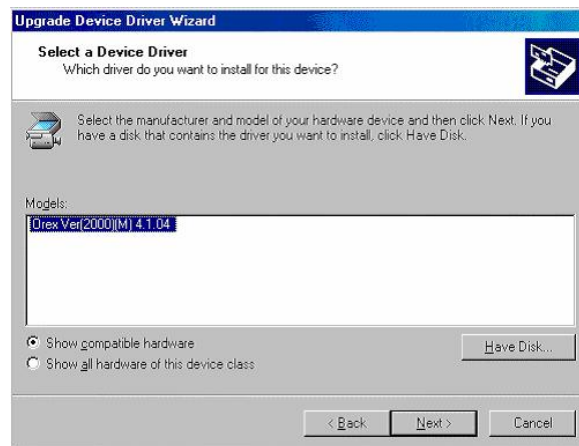


Figure 14: The Select A Device Driver Screen

10. The **Browse** screen opens (Figure 15):



Figure 15: The Browse Screen

11. Choose **Browse**, and navigate to the CD drive. Choose the folder marked Driver for windows 2000 and XP. Note that this driver also works with Windows 98.

12. Click OK. The File Name screen opens (Figure 16):

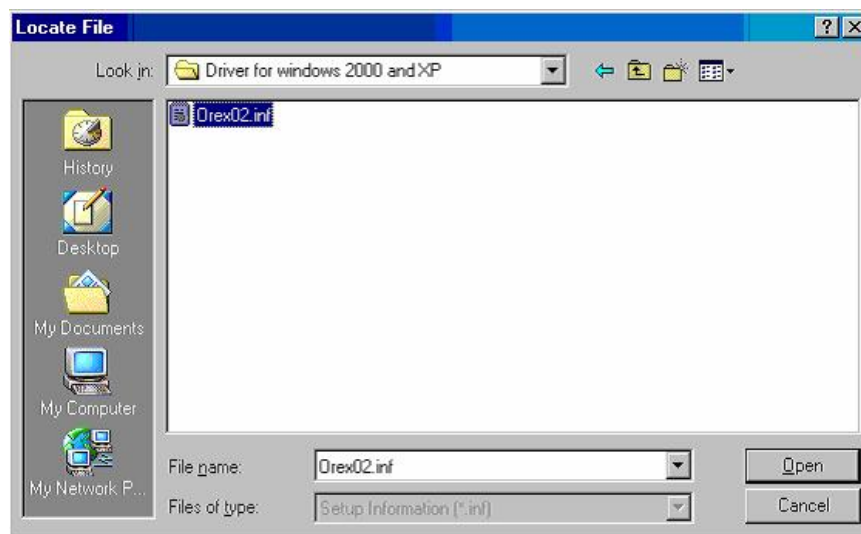


Figure 16: The File Name Screen

13. Choose Orex02.inf. Click **Open**. The **Install From Disk** screen opens (Figure 17):



Figure 17: Install From Disk Screen

Catalog# AT095704-02

14. Choose **OK**. The **Driver List** screen opens (Figure 18):

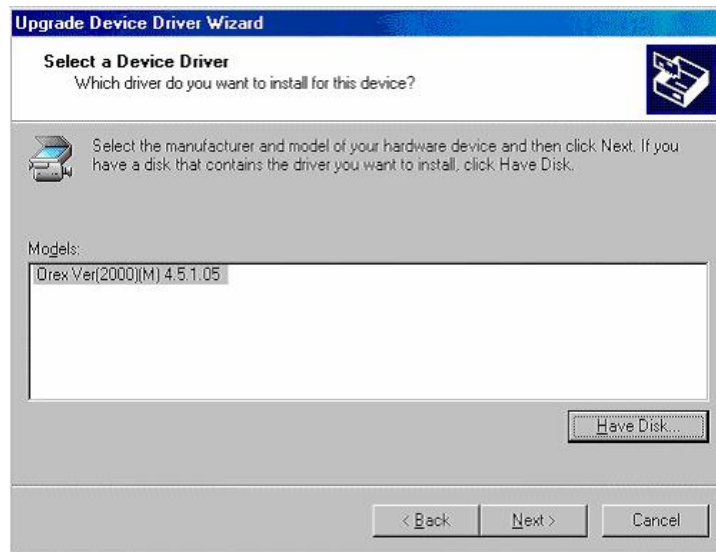


Figure 18: The Driver List Screen

15. Confirm that the correct driver is displayed, and choose **Next**. The **Confirmation** screen opens (Figure 19):



Figure 19: The Confirmation Screen

Catalog# AT095704-02

16. Choose **Next**. The Wizard Completion screen opens (Figure 20):



Figure 20: Wizard Completion Screen

17. Driver Installation is complete

18. Turn the system OFF and then ON. Open the Scanner Interface, and enter **Setup** in **User** mode. Choose the **About** tag. The Service Pack field should read "SP7", and the Driver field should read 4.5.1.05 (Figure 21).

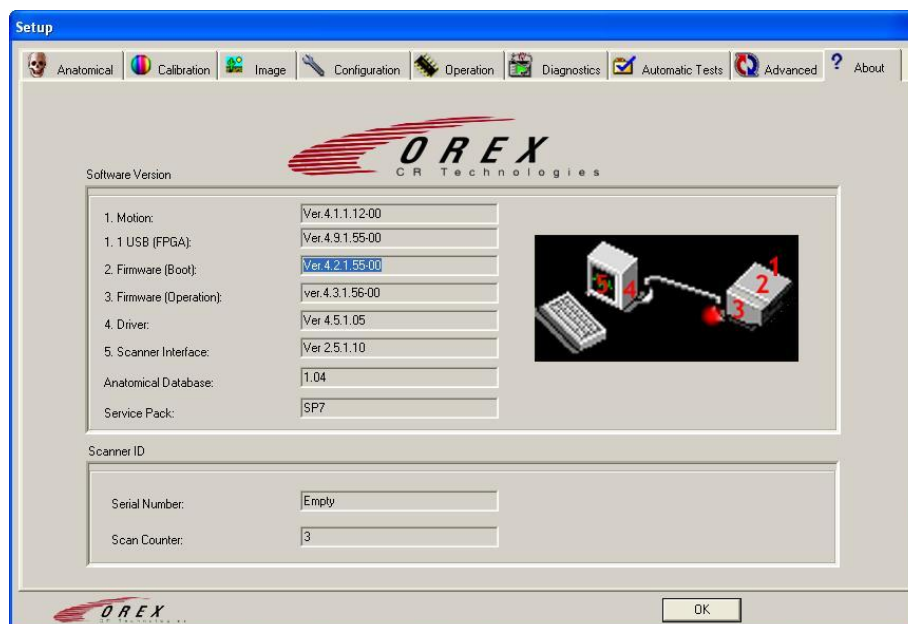


Figure 21: The About Screen After Update

Catalog# AT095704-02